

EX71000 Series

Hardened Managed 8-port 10/100BASE and 2-port Gigabit Ethernet Switch with SFP options



Overview

EtherWAN's EX71000 Series provides a Hardened Fully Managed 10-port switching platform combining high performance switching backbone with robust and secure management features required for mission critical and harsh environments where sustained connectivity is crucial.

The EX71000 Series is equipped with Ten 10/100BASE Fast Ethernet ports, in combination with up to Two Gigabit, Fixed Fiber, or SFP port options. Mountable on a DIN-rail. The EX71000 Series is equipped with EtherWAN's Alpha-Ring self-healing technology, providing less than 15ms fault recovery time making it ideal for applications intolerant to interruption.

Users are able to access management features such as; port security, IGMP snooping, VLANs, GARP protocols, LACP, via web browser, Telnet, SNMP, RMON, TFTP, and RS-232 console interfaces.

EtherWAN — "When Connectivity is Crucial."

Spotlight

• Versatile Connectivity

- Provides 8-port 10/100BASE-TX/FX/BX/SFP plus 2-port Gigabit-SX/LX/BX/SFP

• Hardened Grade

- Wide operating temperature range from -40°C to 75°C (-40°F to 167°F) for extreme environments
- Fanless and ruggedized housing

• Secure Remote Access

- IEEE802.1x, ACL (Access Control List), and RADIUS support

Software Features

Management

- Interface
 - CLI, Telnet and Web Browser
 - SNMP v1/v2c/v3
- Firmware and configuration upgrade and backup via TFTP
- Supports DHCP Server/Client
- RMON (Remote monitoring): group 1, 2, 3, 9
- Port mirroring: TX/RX and both
- NTP (Network Time Protocol) time synchronization
- IEEE802.1ab LLDP (Link Layer Discovery Protocol)

Security

- MAC address filtering
- Enable/disable port
- Storm control (broadcast and multicast types)
- IEEE802.1x LAN access control
- Remote authentication through RADIUS
- SSH for CLI and Telnet security
- SSL for web security
- Multi-level user account/password against unauthorized configuration
- System log (remote/local)

Quality of Service (QoS)

- Priority Queues: 4 queues per port
- Traffic classification based on IEEE802.1p CoS, DSCP, WRR
- (Weighted round robin) and strict mode
- Rate Limiting (Ingress/Egress)

Layer 2 Features

- Auto-negotiation for port speed and duplex mode
- Flow Control
 - IEEE802.3x full duplex mode
 - Back-Pressure half duplex mode
- Redundant Protocol
 - IEEE802.1D Spanning Tree Protocol (STP)
 - IEEE802.1w Rapid Spanning Tree Protocol (RSTP)
 - IEEE802.1s Multiple Spanning Tree Protocol (MSTP)
 - EtherWAN's Alpha-Ring network fault recovery (<15ms)
- VLANs
 - Port-based VLANs
 - IEEE802.1Q Tag VLANs (128 groups, 4096 VID)
 - GVRP (GARP VLAN Registration Protocol)
 - GMRP (GARP Multicast Registration Protocol)
- Link Aggregation
 - Static Trunk (2 groups, support MAC base)
 - IEEE802.3ad Link Aggregation Control Protocol
- IGMP Snooping
 - IGMP snooping v1/v2/v3

Performance

- Switching Capability: 6.8Gbps
- Packet Buffer Size: 2M bits
- MAC Address Table: 8192

Hardware Specifications

Technology

Standards

- IEEE802.3 10BASE-T
- IEEE802.3u 100BASE-TX/100BASE-FX
- IEEE802.3ab 1000BASE-T
- IEEE802.3z 1000BASE-SX/1000BASE-LX
- IEEE802.3x Full duplex and flow control
- IEEE802.1p QoS
- IEEE802.1Q Tag VLANs
- IEEE802.1w RSTP
- IEEE802.1x Port-based Network Access Control

Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps
- 1,488,100pps for 1000Mbps

Packet Buffer Memory

- 2M bits

Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE802.3x full-duplex flow control
- Auto MDI/MDIX

Address Table Size

- 8192 MAC addresses

Power

Input

- Redundant power inputs:
 - 12 - 48VDC (Terminal Block)
 - 12VDC (DC Jack)

Power Consumption

- 11W Max. 0.92A @ 12VDC, 0.46A @ 24VDC

Protection

- Reverse polarity protection

Mechanical

Casing

- Aluminum Case
- IP30

Dimensions

- 60mm (W) x 125mm (D) x 145mm (H)
(2.36" (W) x 4.92" (D) x 5.7" (H))

Weight

- 1.1Kg (2.42lbs.)

Installation

- DIN-Rail (Top hat type 35mm), Rack or Wall mounting

Interface

Ethernet Port

- 10/100BASE-TX: 8, 6 or 4 port
- 100BASE-FX: 0 to 4 ports
- Gigabit: 0, 1 or 2 ports

Console Port

- Port: One DB9 RS-232 port

LED Indicators

- Per Unit: Power 1, Power 2, Power 3
- Per Port: Link/Activity, Speed

Alarm Contact

- One relay output with current 1A @ 24VDC

Environment

Operating Temperature

- -40°C to 75°C (-40°F to 167°F)
Tested @ -40°C to 85°C (-40°F to 185°F)

Storage Temperature

- -40°C to 85°C (-40°F to 185°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)

Regulatory Approvals

ISO

- Manufactured in an ISO9001 facility

Safety

UL508

EMI

FCC Part 15B, Class A

EN61000-6-4

EN55022

EN61000-3-2

EN61000-3-3

EMS

EN61000-6-2

- EN61000-4-2 (ESD Standards)
- EN61000-4-3 (Radiated RFI Standards)
- EN61000-4-4 (Burst Standards)
- EN61000-4-5 (Surge Standards)
- EN61000-4-6 (Induced RFI Standards)
- EN61000-4-8 (Magnetic Field Standards)

Environmental Test Compliance

IEC60068-2-6 Fc (Vibration Resistance)

IEC60068-2-27 Ea (Shock)


FED STD 101C Method 5007.1 (Free fall w/ package)

Industrial Compliance


NEMA TS2

EN50121-4

Application Diagram

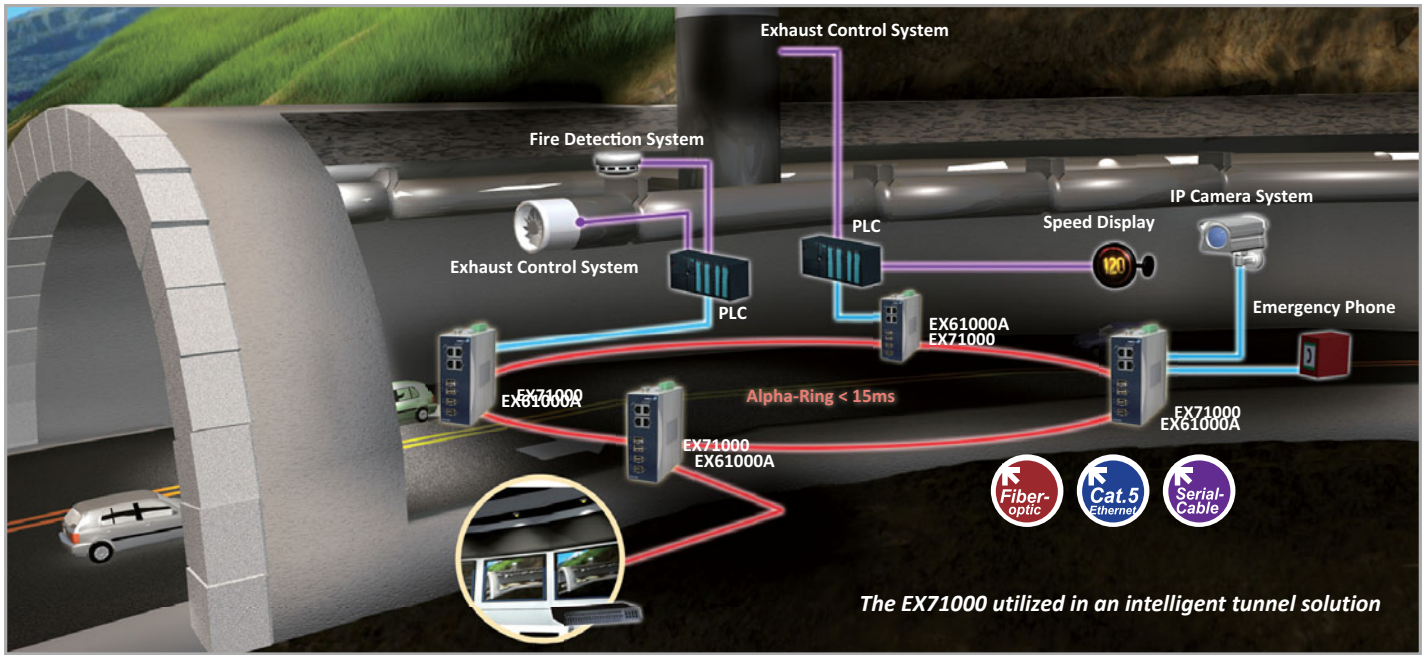

Dimensions

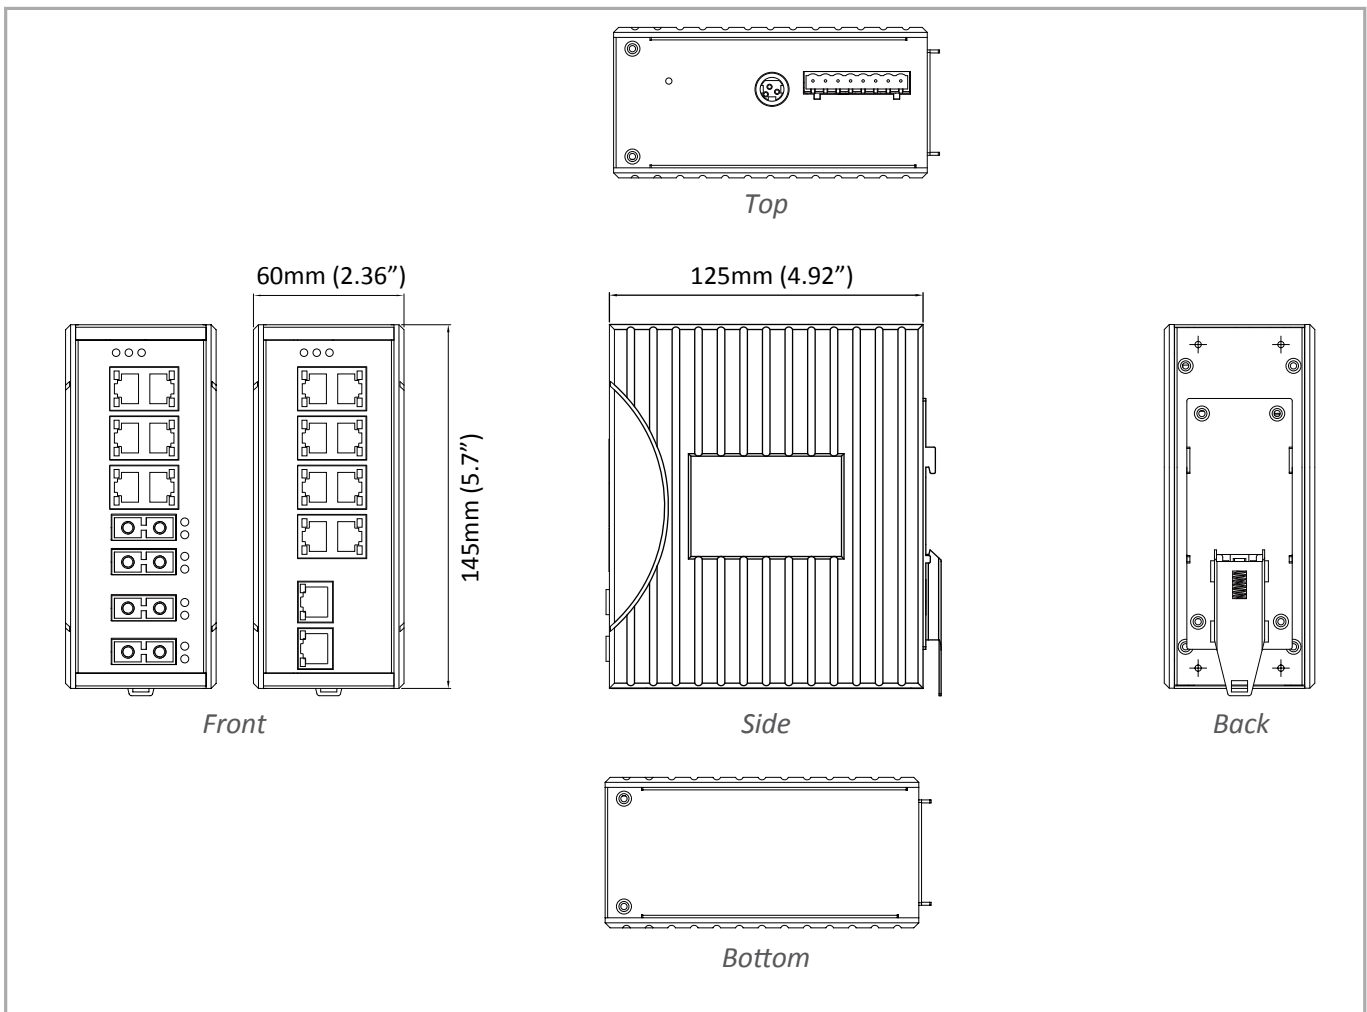

Ordering Information

Model

| | |
|--------------------|--|
| EX71800-00B | 8-port 10/100BASE-TX Hardened Managed Ethernet Switch |
| EX71801-0YB | 8-port 10/100BASE-TX + 1-port Gigabit Hardened Managed Ethernet Switch |
| EX71802-0YB | 8-port 10/100BASE-TX + 2-port Gigabit Hardened Managed Ethernet Switch |
| EX71802-02B | 8-port 10/100BASE-TX + 2-port 10/100/1000BASE-TX LAN Bypass |
| EX71610-X0B | 6-port 10/100BASE-TX + 1-port 100BASE-FX Hardened Managed Ethernet Switch |
| EX71620-X0B | 6-port 10/100BASE-TX + 2-port 100BASE-FX Hardened Managed Ethernet Switch |
| EX71621-XYB | 6-port 10/100BASE-TX + 2-port 100BASE-FX + 1-port Gigabit Hardened Managed Ethernet Switch |
| EX71622-XYB | 6-port 10/100BASE-TX + 2-port 100BASE-FX + 2-port Gigabit Hardened Managed Ethernet Switch |
| EX71420-X0B | 4-port 10/100BASE-TX + 2-port 100BASE-FX Hardened Managed Ethernet Switch |
| EX71422-XYB | 4-port 10/100BASE-TX + 2-port 100BASE-FX + 2-port Gigabit Hardened Managed Ethernet Switch |
| EX71440-X0B | 4-port 10/100BASE-TX + 4-port 100BASE-FX Hardened Managed Ethernet Switch |

* DIN-Rail mounting kit included

100FX Fiber Options (X)

| | |
|----------|---|
| 1 | Multi Mode (SC) - 2Km |
| 2 | Multi Mode (ST) - 2Km |
| 6 | Multi Mode (SC) WDM-TX:1310nm/RX:1550nm - 2Km |
| 7 | Multi Mode (SC) WDM-TX:1550nm/RX:1310nm - 2Km |
| 8 | Multi Mode (SC) WDM-TX:1310nm/RX:1550nm - 5Km |
| 9 | Multi Mode (SC) WDM-TX:1550nm/RX:1310nm - 5Km |
| A | Single Mode (SC) - 20Km |
| B | Single Mode (SC) - 40Km |
| H | Single Mode (ST) - 20Km |
| P | Single Mode (SC) WDM-TX:1310nm/RX:1550nm - 20Km |
| Q | Single Mode (SC) WDM-TX:1550nm/RX:1310nm - 20Km |
| R | Single Mode (SC) WDM-TX:1310nm/RX:1550nm - 40Km |
| S | Single Mode (SC) WDM-TX:1550nm/RX:1310nm - 40Km |
| V | 100BASE SFP |

Gigabit Port Options (Y)

| | |
|----------|---|
| 1 | 10/100/1000BASE-TX |
| 3 | 1000BASE-SX(SC) - 550m |
| 4 | 1000BASE-SX (SC) - 2Km |
| 5 | 1000BASE-SX (ST) - 550m |
| A | 1000BASE-LX (SC) - 10Km |
| B | 1000BASE-LX (SC) - 20Km |
| R | 1000BASE-BX (SC) WDM-TX:1310nm/RX:1550nm - 20Km |
| S | 1000BASE-BX (SC) WDM-TX: 1550nm/RX: 1310nm - 20Km |
| V | 1000BASE SFP |

Optional Accessories

| | |
|--------------------|---|
| KP-AA96-480 | Panel mounting Kits |
| KR-BK71000 | Rack mounting Kits |
| DR-30-24 | 30W/1.5A DIN-Rail 24VDC Industrial Power Supply (for Terminal Block) |
| DR-60--24 | 60W/2.5A DIN-Rail 24VDC Industrial Power Supply (for Terminal Block) |
| DR-75-24 | 75W/3.2A DIN-Rail 24VDC Industrial Power Supply (for Terminal Block) |
| DR-120-24 | 120W/5A DIN-Rail 24VDC Industrial Power Supply (for Terminal Block) |
| 41-136046-X | 36W/3A 12VDC hardened power adapter with open wire in aluminum housing (for Terminal Block) (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA |
| 41-136044-X | 36W/3A 12VDC hardened power adapter with latched DC Jack in aluminum housing (for DC Jack) (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA |