

EX34000 Series

Industrial Unmanaged 8-port 10/100BASE PoE (4 x PoE)
Ethernet Switch



Overview

EtherWAN's EX34000 Series provides an industrial 8-port switching platform supporting IEEE802.3af Power over Ethernet, high performance switching with robust features required for mission-critical and harsh environments where sustained connectivity is crucial.

The EX34000 Series is equipped with 4 10/100BASE-TX PoE ports, in combination with two 100FX Fiber options.

The IEEE802.3af PoE ports provide up to 15.4W/port with a total power budget of 61.6W, making the switch truly versatile for connecting with PoE Powered Devices (PD) with different bandwidth and power consumption requirements.

EtherWAN—"When Connectivity is Crucial."

Spotlight

- **Industrial Grade**
 - Supports -10°C to 60°C (14°F to 140°F) operating temperature
- **PoE Connectivity**
 - Port 1 to 4 supports IEEE802.3af Power over Ethernet
- **Fiber Connectivity**
 - Up to two 100BASE-FX ports with SC and ST options

Hardware Specifications

Technology

Standards

- IEEE802.3 10BASE-T
- IEEE802.3u 100BASE-TX/100BASE-FX
- IEEE802.3af Power over Ethernet
- IEEE802.3x Full duplex and flow control

Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps

Packet Buffer Memory

- 1M bits

Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE802.3x full-duplex flow control
- Auto MDI/MDIX

Address Table Size

- 1024 MAC addresses

Power

Input

- Redundant power inputs:
Terminal Block: 47 - 55VDC
DC Jack: 47 - 55VDC

Power Consumption

- Device: Max. 10W (without PoE)
- PoE power budget (depends on power input): 61.6W Max.

PoE Power Output

- Port 1 to 4
- IEEE802.3af: up to 15.4W/port, 47 - 55VDC, 350mA Max.

Protection

- Reverse polarity protection
- Overload current protection

Mechanical

Casing

- Aluminum case
- IP30

Dimensions

- 62mm (W) x 110mm (D) x 135mm (H)
(2.44" (W) x 4.33" (D) x 5.31" (H))

Weight

- 1Kg (2.2lbs.)

Installation

- DIN-Rail (Top hat type 35mm), Panel, or Rack mounting

Interface

Ethernet Ports

- 10/100BASE-TX: 8, 7 or 6 ports
- 100BASE-FX: 0, 1 or 2 ports

LED Indicators

- Per Unit: Power 1 (Green),
Power 2 (Green),
Power 3 (Green)
- Per Port: Link/Activity (Green)

Alarm Contact

- One relay output with current 1A @ 24VDC

Environment

Operating Temperature

- -10°C to 60°C (14°F to 140°F)
Tested @ -20°C to 70°C (-4°F to 158°F)

Storage Temperature

- -40°C to 85°C (-40°F to 185°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)

Regulatory Approvals

ISO

- Manufactured in an ISO9001 facility

EMI

FCC Part 15B, Class A

VCCI, Class A

EN61000-6-4

EN55022 Class A

EMS

EN61000-6-2

- EN61000-4-2 (ESD Standards)
- EN61000-4-3 (Radiated RFI Standards)
- EN61000-4-4 (Burst Standards)
- EN61000-4-5 (Surge Standards)
- EN61000-4-6 (Induced RFI Standards)
- EN61000-4-8 (Magnetic Field Standards)


Environmental Test Compliances

IEC60068-2-6 Fc (Vibration)

IEC60068-2-27 Ea (Shock)

FED STD 101C Method 5007.1 (Free fall w/ package)

Dimensions

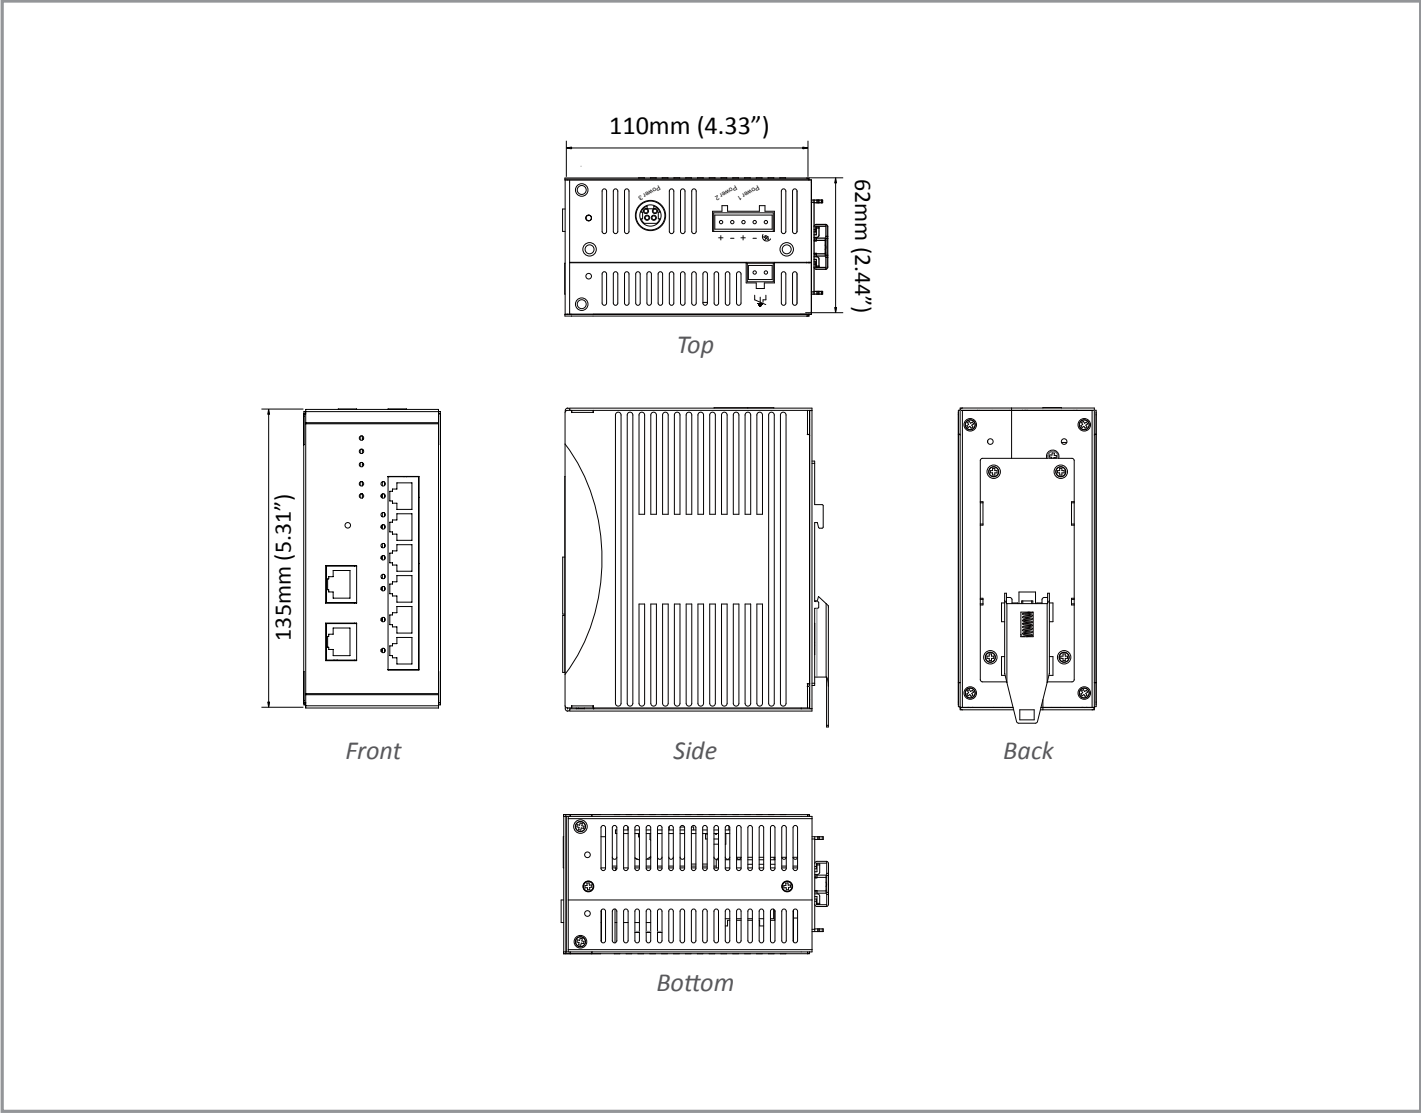

Ordering Information

Model	
EX34080-00B	Industrial Unmanaged 8-port 10/100BASE-TX PoE Ethernet Switch
EX34071-X0B	Industrial Unmanaged 7-port 10/100BASE-TX + 1-port 100BASE-FX PoE Ethernet Switch
EX34062-X0B	Industrial Unmanaged 6-port 10/100BASE-TX + 2-port 100BASE-FX PoE Ethernet Switch

* DIN-Rail mounting kit included

Ordering Information - continued

100FX Fiber Options (X)

1	Multi Mode (SC) - 2Km
2	Multi Mode (ST) - 2Km
6	Multi Mode (SC) WDM-TX:1310nm/RX:1550nm - 2Km
7	Multi Mode (SC) WDM-TX:1550nm/RX:1310nm - 2Km
8	Multi Mode (SC) WDM-TX:1310nm/RX:1550nm - 5Km
9	Multi Mode (SC) WDM-TX:1550nm/RX:1310nm - 5Km
A	Single Mode (SC) - 20Km
B	Single Mode (SC) - 40Km
H	Single Mode (ST) - 20Km
P	Single Mode (SC) WDM-TX:1310nm/RX:1550nm - 20Km
Q	Single Mode (SC) WDM-TX:1550nm/RX:1310nm - 20Km
R	Single Mode (SC) WDM-TX:1310nm/RX:1550nm - 40Km
S	Single Mode (SC) WDM-TX:1550nm/RX:1310nm - 40Km

**More 100FX Fiber options also available upon request.*

Optional Accessories

KP-AA96-480	Panel mounting Kit
KR-BK43-400	Rack mounting Kit
GS120A-48	120W/2.5A 48VDC Power Adapter with latched DC Jack in plastic housing (for DC Jack)
DR-120-48	120W/2.5A DIN-Rail 48VDC Industrial Power Supply (for terminal block)