

# LMP-0800G Series

## Features

**8-Port Industrial Gigabit PoE+ Managed Ethernet Switches, w/8\*10/100/1000Tx (30W/Port); 48-55VDC Power Input**




- ▶ Supports 8\*10/100/1000Tx IEEE 802.3at/af Compliant with 30W/Port
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ PoE Ping Alarm Function for PoE Ports Power Recycle
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Port Lock Function for Unauthorized Access Based on MAC Address Blocking
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Operating Temp –STD: -10~70°C, EOT: -40~75°C
- ▶ 5-Year Warranty

## INTRODUCTION

**Antaira Technologies' LMP-0800G series** is an 8-port industrial PoE+ managed Ethernet switch that is embedded with 8\*10/100/1000Tx Ethernet ports that support IEEE802.3at/af for a maximum of 30W/port. The LMP-0800G series is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, port lock, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMP-0800G series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance within transportation, ITS and any other outdoor or harsh environment.

## DIMENSIONS

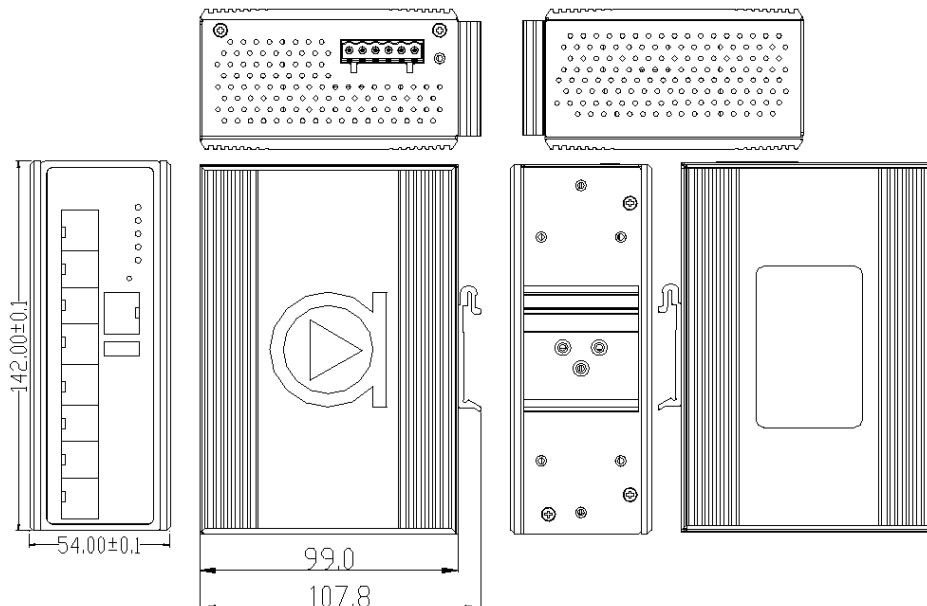

## SPECIFICATIONS

<b>Technology</b>	IEEE 802.3 10Tx Ethernet IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000Tx Gigabit Ethernet IEEE 802.3x Flow Control for Full Duplex IEEE 802.3ad for Port Trunk with LACP IEEE 802.3at/af PoE (Power-over-Ethernet) IEEE 802.1d STP (Spanning Tree Protocol) IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol IEEE 802.1Q for VLAN Tagging IEEE 802.1x for Network Authentication IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization
<b>Standards</b>	IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol IEEE 802.1Q for VLAN Tagging IEEE 802.1x for Network Authentication IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization
<b>Protocol</b>	IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SMTP, SMTp, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6
<b>Switch Properties</b>	
<b>Switch Architecture</b>	Back-Plane (Switching Fabric): 16.0Gbps
<b>Configuration</b>	Web Console, Telnet, CLI
<b>Processing Type</b>	Store and Forward
<b>Flow Control</b>	IEEE 802.3x for full duplex mode, back pressure for half duplex mode
<b>Transfer Rate</b>	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet 1,488,000pps for Gigabit Ethernet
<b>Packet Buffer</b>	4 Mbits
<b>Jumbo Frame</b>	9.6K
<b>MAC Table Size</b>	8K
<b>VLAN Group</b>	1 ~ 4094
<b>IGMP Group</b>	Up to 256 Groups
<b>Port Interface</b>	
<b>Ethernet RJ45 Port</b>	8*10/100/1000Tx (PSE: 30W/Port) auto negotiation speed, Full/Half duplex mode, and auto MDI connection
<b>RS232 Serial Console</b>	1*RS232 in RJ45 connector with console cable, 115.2Kbps, 8,N,1
<b>Configuration Backup</b>	1*USB 2.0

<b>Protection</b>	
<b>Overload Current</b>	Present
<b>Power Reverse Polarity</b>	Present
<b>CPU Watchdog</b>	Present
<b>Network Cable</b>	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA-568 100-ohm (100m) 1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
<b>Mechanical Characteristics</b>	
<b>LED Indicator</b>	Per Unit: Power 1 & 2 (Green), Fault (Green/Red) PoE: Feeding Power (Green)
<b>Housing</b>	Metal IP30 rated
<b>Dimension</b>	54 x 142 x 99 mm
<b>Weight</b>	Unit: 2.1 lbs.; Shipping: 2.9 lbs.
<b>Mounting</b>	DIN-Rail; Wall-Mount (optional)
<b>Power Requirement</b>	
<b>Input Voltage</b>	48~55VDC Redundant Input
<b>Power Connection</b>	1 removable 6-contact terminal block
<b>PoE Power Output</b>	25W/port @ 48VDC power input; 30W/port @ 51~55VDC power input
<b>Power Consumption</b>	15 Watts (no PD included); 255 Watts @48~55VDC
<b>Environmental Limits</b>	
<b>Operating Temperature</b>	STD: -10 to 70°C EOT: -40 to 75°C
<b>Storage Temperature</b>	-40°C ~ 85°C
<b>Ambient Relative Humidity</b>	5 to 95%, (non-condensing)
<b>Regulatory Approvals</b>	
<b>EMI</b>	FCC Class A
<b>EMS</b>	IEC61000-4-2,3,4,5,6,8 IEC61000-6-2,4
<b>Free Fall</b>	IEC60068-2-32
<b>Shock</b>	IEC60068-2-27
<b>Vibration</b>	IEC60068-2-6
<b>Green</b>	RoHS Compliant
<b>Certifications</b>	FCC, CE, UL-61010-2-201(pending)
<b>Warranty</b>	5 Years

## ORDERING INFO

<b>LMP-0800G</b>	8-Port Industrial Gigabit PoE+ Managed Ethernet Switch with 8*10/100/1000Tx; 48~55VDC Power Input
<b>LMP-0800G-T</b>	8-Port Industrial Gigabit PoE+ Managed Ethernet Switch with 8*10/100/1000Tx; 48~55VDC Power Input; EOT: -40° to 75°C

### Optional Accessories

<b>DR-75-48</b>	75W Industrial Din Rail Power Supply (48VDC)
<b>DR-120-48</b>	120W Industrial Din Rail Power Supply (48VDC)
<b>SDR-240-48</b>	240W Industrial Din Rail Power Supply (48VDC)
<b>DIN-RACK-2U</b>	Din-Rail to 19" Rack Mount Adapter for all Din-Rail Mountable Products, 2U Height